FRONT END CYLINDER

TYPE : MF-RP


SERIE : Ø 187

Technical Characteristics

CYL.TYPE

For Tipping Weight See Advices Below

MF 187.5.5125 RP - D.1345

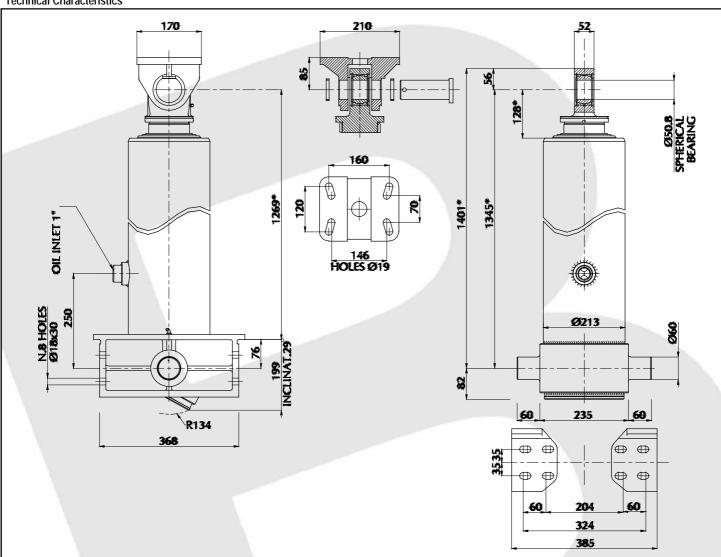

Cylinder stages

| Cyllinder stayes | | | | | | | | | | | | | | | | | | |
|---|--------|------|------|------|--|------|------|--|--------------------------|-------|-------|------|----------------------------------|------|------|------|--|--|
| Ø Stage | Ø045 | Ø060 | Ø076 | Ø092 | Ø108 | Ø069 | Ø088 | Ø107 | Ø126 | Ø145 | Ø165 | Ø167 | Ø187 | Ø210 | Ø236 | Ø265 | | |
| Thrust at 200 Bar [Tons] | | | | | | | | 18.00 | 24.90 | 33.00 | 42.80 | | 54.90 | | | | | |
| Stages of cylinder | | | | | | | | 0 | 0 | 0 | 0 | | 0 | | | | | |
| Specifications | | | | | | | | | Brackets and Accessories | | | | | | | | | |
| Stages number | | 05 | | | | - | | Chassis bracket [2 Units x cylinder] | | | | SIL | SIL#MIH 15.48 [Kgs] x 2 = | | | | | |
| Cylinder Stroke | [mm] | 51 | 5125 | | | | | Lifting bracket | | | | | SSL#PFH 11.75 [Kgs] x 1 = | | | | | |
| Cylinder weight only [Kgs] | | 27 | 272 | | | | | Chassis brackets mounting kit | | | | KFS | KFSI#001 | | | | | |
| Working volume | [Ltrs] | 88 | .9 | | | | | | | | | | | | | | | |
| Max Working pressure | [Bar] | 20 | 0 | | | | | | | | | | | | | | | |
| Technical information | | | | | | | | Recommendation | | | | | | | | | | |
| □ Oil : See oil specification sheet | | | | | | | | This Binotto cylinder is designed as a lifting device only | | | | | | | | | | |
| Tipping weight : Net weight body + Payload | | | | | | | | □ It must not be used as a structural member or be subject to side loads | | | | | | | | | | |
| □ Fitted centres [*] : Closed centres plus 20 mm pull out | | | | | | | | Pump flow in consultation with Binotto engineering department | | | | | | | | | | |
| Advicos | | | | | and a state of the | | | | | | | | | | | | | |

Advices

All our cylinders are manufactured to suit the particular application in the differing world markets/climate. Should you require details of the exact lifting capacity of the cylinder that has been selected for your application/vehicle then please contact our technical department who will be only pleased to explain or advise.

BINOTTO SRL

BINOTTO IS CONSTANTLY ENGAGED IN IMPROVING ITS PRODUCTS AND THEREFORE RESERVES THE RIGHT TO MODIFY WITHOUT ANY NOTICE CHARACTERISTICS SHOWN VIA DIVISIONE JULIA, 7/B - 36031 DUEVILE [VI] ITALY • TEL. 0039.0444.593290 - FAX. 0039.0444.593357 • E-Mail: INFO@BINOTTO.COM Edit.: 04 • 2006 Rev.: 01 • 2006 Date: 01.09.2006