
FRONT END CYLINDER TYPE : MF-RP

SERIE : Ø 187

CYL.TYPE

MF 187.5.6800 RP - D.1695

For Tipping Weight See Advices Below

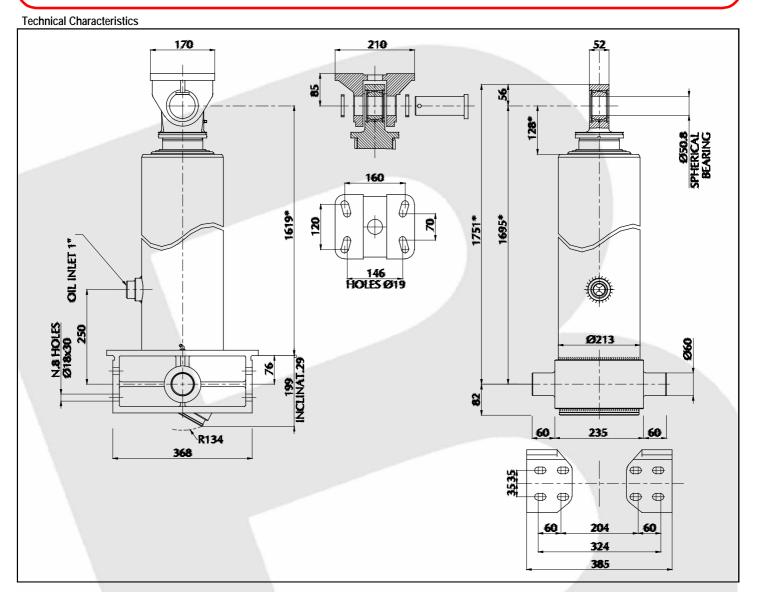

Cylinder stages

Cylinder stages																
Ø Stage	Ø045	Ø060	Ø076	Ø092	Ø108	Ø069	Ø088	Ø107	Ø126	Ø145	Ø165	Ø167	Ø187	Ø210	Ø236	Ø265
Thrust at 200 Bar [Tons]								18.00	24.90	33.00	42.80		54.90			
Stages of cylinder								0	0	0	0		0			/
Specifications		*	•	•		•	-	Brackets	and Ac	cessorie	S	<u>.</u>	<u>.</u>			
Stages number		05				-		Chassis bracket [2 Units x cylinder]				SIL	SIL#MIH 15.48 [Kgs] x 2 =			
Cylinder Stroke [mm]			6800					Lifting bracket				SSI	SSL#PFH 11.75 [Kgs] x 1 =			
Cylinder weight only [Kgs]			337					Chassis brackets mounting kit			KFS	KFSI#001				
Working volume	[Ltrs]	11	8.0													
Max Working pressure	[Bar]	20	0													
Technical information								Recomm	endatio	n						
Oil : See oil specification sheet								This Binotto cylinder is designed as a lifting device only								
Tipping weight : Net weight body + Payload								It must not be used as a structural member or be subject to side loads								
□ Fitted centres [*] : Closed centres plus 20 mm pull out								Pump flow in consultation with Binotto engineering department								
Advisos							·									

Advices

All our cylinders are manufactured to suit the particular application in the differing world markets/climate. Should you require details of the exact lifting capacity of the cylinder that has been selected for your application/vehicle then please contact our technical department who will be only pleased to explain or advise.

BINOTTO SRL

BINOTTO IS CONSTANTLY ENGAGED IN IMPROVING ITS PRODUCTS AND THEREFORE RESERVES THE RIGHT TO MODIFY WITHOUT ANY NOTICE CHARACTERISTICS SHOWN VIA DIVISIONE JULIA, 7/B - 36031 DUEVILLE [VI] ITALY • TEL. 0039.0444.593290 - FAX. 0039.0444.593357 • E-MAIL. INFO@BINOTTO.COM Edit.: 04 • 2006 Rev.: 01 • 2006 Date: 01.09.2006

Pag.: MF-RP 187.5.6800_02