FRONT END CYLINDER


TYPE : MFC

SERIE : Ø 126

CYL.TYPE MFC 126.3.4380 - Ic.0267

For Tipping Weight See Advices Below

Technical Characteristics

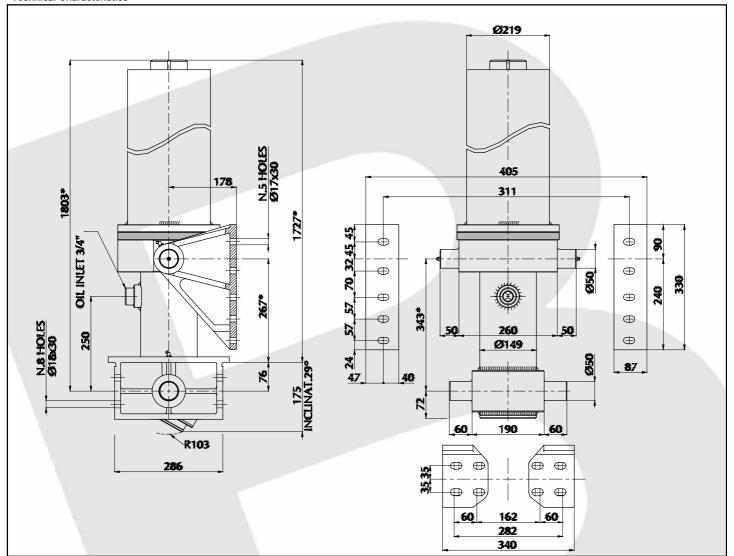

Cylinder stages

| Ø Stage | Ø045 | Ø060 | Ø076 | Ø092 | Ø108 | Ø069 | Ø088 | Ø107 | Ø126 | Ø145 | Ø165 | Ø167 | Ø187 | Ø210 | Ø236 | Ø265 |
|--------------------------|------|------|------|------|------|------|-------|-------|-------|------|------|------|------|------|------|------|
| Thrust at 200 Bar [Tons] | | | | | | | 12.20 | 18.00 | 24.90 | | | | | | | |
| Stages of cylinder | | | | | | | | | | | | | | | | / |

Specifications

| o poomounomo | | |
|----------------------|----------|------|
| Stages number | 1 | 03 |
| Cylinder Stroke | [mm] | 4380 |
| Cylinder weight only | [Kgs] | 241 |
| Working volume | [Ltrs] | 40.2 |
| Max Working pressure | [Bar] | 200 |

Technical information

| □ Oil | : See oil specification sheet |
|----------------------|--------------------------------------|
| ☐ Tipping weight | : Net weight body + Payload |
| ☐ Fitted centres [*] | : Closed centres plus 20 mm pull out |

Brackets and Accessories

| Chassis bracket [2 Units x cylinder] | SIL#MDH | 12.62 [Kgs] x 2 = |
|---------------------------------------|----------|-----------------------------------|
| Lifting bracket right hand | SSL#PGH | 10.30 [Kgs] x 1 = |
| Lifting bracket left hand | SSL#PHH | 10.30 [Kgs] x 1 = |
| Chassis brackets mounting kit | KFSI#001 | |
| Lifting bracket mounting kit | KFSS#002 | |

Recommendation

| ☐ This Binotto cylinder is designed as a lifting device only |
|--|
| ☐ It must not be used as a structural member or be subject to side loads |
| ☐ Pump flow in consultation with Ringtto engineering department |

Advices

All our cylinders are manufactured to suit the particular application in the differing world markets/climate. Should you require details of the exact lifting capacity of the cylinder that has been selected for your application/vehicle then please contact our technical department who will be only pleased to explain or advise.

BINOTTO SRL

BINOTTO IS CONSTANTLY ENGAGED IN IMPROVING ITS PRODUCTS AND THEREFORE RESERVES THE RIGHT TO MODIFY WITHOUT ANY NOTICE CHARACTERISTICS SHOWN VIA DIVISIONE JULIA, 7/B - 36031 DUEVILLE [VI] ITALY • TEL. 0039.0444.593290 - FAX. 0039.0444.593357 • E-MAIL. INFO@BINOTTO.COM

Edit.: 04 • 2006 Rev.: 01 • 2006 Date: 01.09.2006

Pag.: MFC 126.3.4380_02